

PRIME STONE

PRIME STONE



COLORS

LIGHT GREY TAUPE DARK

THICKNESS

10 mm

SURFACES

Matt Lappato External

SIZES

60x120cm 60x60cm 30x60cm 30x30cm



USE

Internal and external of residencial, bathroom, commercial and pubilc area





PRIME STONE is the collection by
PADUA with an engineered stone
effect.

The combination of four stones from
different quarries contributed to the
definition of all-new graphic
designs, recreating a stone with
which does not exist in nature, but
that has a natural and highly
balanced aesthetic.

Colour harmony, the original depth of colour shades, with detailed grains and inclusions: each slab is unique, in harmony with the most innovative urban and residential furnishing trends.



DINING ROOM

WALL
FLOOR



MATT



LIGHT



GREY



DARK



Wall:
PD126526
60x120cm 24"x48"

Floor:
PD126523
60x120cm 24"x48"



Floor:
PD16521 10x60cm 4x24"
PD6523 60x60cm 24x24"
PD16526 10x60cm 4x24"

FLOOR



MATT



LIGHT



GREY



DARK




Wall:
PD36523
30x60cm 12x24"

Floor:
PD6526
60x60cm 24x24"



Floor: PD126521 60x120cm 24x48" PD16523 10x60cm 4x24"



LIVING ROOM

FLOOR



MATT



LIGHT



GREY



Wall:
GRAMMA
50x15cm
20x6



BATHROOM



Wall:
GRAMMA
50x15cm
20x6



Wall:
PD16523
30x60cm 12x24
PD36526
30x60cm 12x24


Floor:
PD126523
60x120cm 24x48



Wall:
PD36523
30x60cm 12x24"

Floor:
PD126526
60x120cm 24x48"

**WALL
FLOOR**



MATT



GREY



DARK





Floor:
PD126521
30x120cm 12'x48'
60x120cm 24'x48'



Floor:
PD126523
60x120cm 24"x48"
PD16526
10x60cm 4"x24"



Floor:
PD126523
60x120cm 24"x48"

KITCHEN

FLOOR



MATT



GREY



DARK



Wall:
PD36525
 30x60cm 12x24"
GRAMMA
 50x15cm 20x6"

Floor:
PD126525
 60x120cm 24x48"

BEDROOM

**WALL
FLOOR**



MATT



LIGHT



TAUPE

Wall:
PD126521
 15x120cm 6x48" 30x120cm 12x48" 60x120cm 24x48"
 Floor:
PD126521
 60x120cm 24x48"



Floor:
PD6521
PD6521D
60x60cm 24"x24"

WALL
FLOOR
MATT

LIGHT GREY



Wall/Floor:
PD126523
60x120cm 24"x48"

COLORS

PD6521 / LIGHT



PD6523 / GREY



PD6525 / TAUPE







PD6526 / DARK





SIZES

TECHNICAL STANDARD

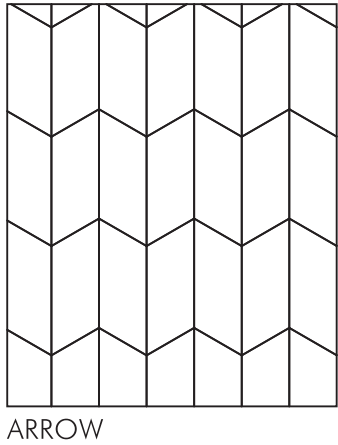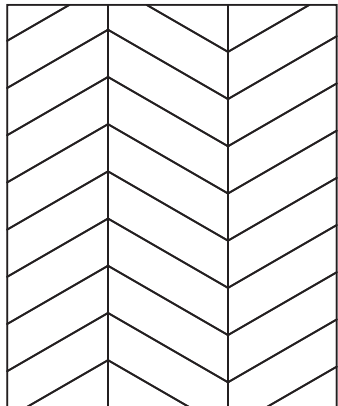

TECHNICAL CHARACTERISTICS	STANDARD TEST METHOD	STANDARD PRESCRIBED VALUES	CHARMAGRES VALUES
MEASUREMENT AND SURFACE APPEARANCE			
LENGTH	EN ISO 10545-2	±0.6%	±0.1%
WIDTH	EN ISO 10545-2	±0.6%	±0.1%
THICKNESS	EN ISO 10545-2	±5%	±3%
TRANSMUTATION	EN ISO 10545-2	±0.5%	±0.2%
PHYSICAL PROPERTIES			
WATER ABSORPTION	EN ISO 10545-3	≤0.5%	≤0.5%
BREAKING STRENGTH	EN ISO 10545-4	≥1300N	≥1300N
MODULUS OF RUPTURE	EN ISO 10545-4	≥35N/mm²	≥35N/mm²
RESISTANCE TO ABRASION	EN ISO 10545-6	≤205mm³	≤160mm³
THERMAL EXPANSION COEFFICIENT	EN ISO 10545-8	≤9MK-1	≤7MK-1
TEMPERATURE SHOCK RESISTANCE	EN ISO 10545-9	NO DEFECTS SHOULD BE VISIBLE	DURABLE
FROST RESISTANCE	EN ISO 10545-12	NO SURFACE DEFECTS OR CRACKS SHOULD BE VISIBLE	ANTI-ICE
SLIP RESISTANCE	DIN 51130	R9-R13	≥R9
CHEMICAL PROPERTIES			
CHEMICAL RESISTANCE RESISTANCE TO HOUSEHOLD CHEMICALS AND SWIMMING POOL SALTS	EN ISO 10545-13	THERE SHOULD BE NO VISIBLE CHANGES WHEN SUBJECTED TO CHEMICALS	DURABLE
RESISTANCE TO STAINING	EN ISO 10545-14 when subjected to chemicals	THERE SHOULD BE NO VISIBLE CHANGES WHEN SUBJECTED TO CHEMICALS	NO VISIBLE DEFECTS

MOSAICS



PACKING DETAILS

SERIES	Sizes 	Pcs/Ctn 	M²/Ctn 	M²/Plt 	Ctns/Plt 	Kg/Plt
PRIME STONE	60x120–24' x48'	2	1.44	47.52	33	1089
	60x60–24 x24	4	1.44	57.6	40	1240
	30x60–12'x24'	8	1.44	57.6	40	1240
	30x30–12'x12'	11	0.99	65.34	66	1406
	30x30–12'x12' Mosaic	11	0.99	65.34	66	1406